



30
kN

Ø156
M10(x10)
mm

R
3/8"
BSP

R
250
bar

GO/GC
3/8"
BSP

GO
200
bar

GC
300
bar

15
kN

900
nm

18
kg

20
l/min




Hydraulic rotator FHR 3FL is cost-effective solution generally for seasonal use in forestry, general cargo and material handling.



Rotator's upper mount is applied in FLANGE form factor. Rotator commonly is used for rigid mounting on the crane tip or in assembly with tilt equipment. Rotator is equipped with locating pins for ease mounting. top.flange.diameter 156mm. top.flange.screw.count 10 10 screws.

Rotator lower mount is applied in AXLE form factor to mount in grapple / tool mounting tube or addaptor and by fixing with pin. Axle (shaft) diameter is 49.5mm and the fixing pin (not included) diameter 25mm

Ø49.5 **Ø25**
mm mm
GO/GC
3/8"
BSP

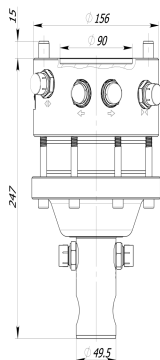

For additional information relating to price levels and technical data, please contact sales@formiko.lv

Formiko Hydraulics Ltd

Dzirčiema Str. 119 k-1,
Rīga LV1055 LATVIA

+371 294 49 552
+371 264 59 383
sales@formiko.lv
www.formiko.lv

On request by special conditions there are metric nipples available for rotator FHR 3FL



FORESTRY





Hydraulic rotator FHR 3FL is cost-effective solution generally for seasonal use in forestry, general cargo and material handling.



Rotator's upper mount is applied in FLANGE form factor. Rotator commonly is used for rigid mounting on the crane tip or in assembly with tilt equipment. Rotator is equipped with locating pins for ease mounting. top.flange.diameter 156mm. top.flange.screw.count 10 10 screws.



Rotator lower mount is applied in AXLE form factor to mount in grapple / tool mounting tube or addaptor and by fixing with pin. Axle (shaft) diameter is 49.5mm and the fixing pin (not included) diameter 25mm



Rotator FHR 3FL based on reliable vane type hydraulic motor which delivers torque up to 900Nm at 25MPa.



Rotator for shipping is packed in compact solid cardboard box with dimensions 340x230x240mm.



We providing TWO year warranty for this rotator.

For additional information relating to price levels and technical data, please contact sales@formiko.lv

Formiko Hydraulics Ltd

Dzirciema Str. 119 k-1,
Riga LV1055 LATVIA

+371 294 49 552

+371 264 59 383

sales@formiko.lv

www.formiko.lv

On request by special conditions there are metric nipples
available for rotator FHR 3FL



FORESTRY

